




Two-stage Gas Driven Compressors

Number One in Their Class

For fleet and field service applications, count on two-stage, gas-driven air compressors from Ingersoll Rand. Ideal for remote pneumatic applications, emergency production line needs and other situations where electrical power is scarce, these compressors deliver the air you need, when and where you need it. They're the top seller in their class, and they're another reason why Ingersoll Rand is the world leader in air compressor manufacturing.

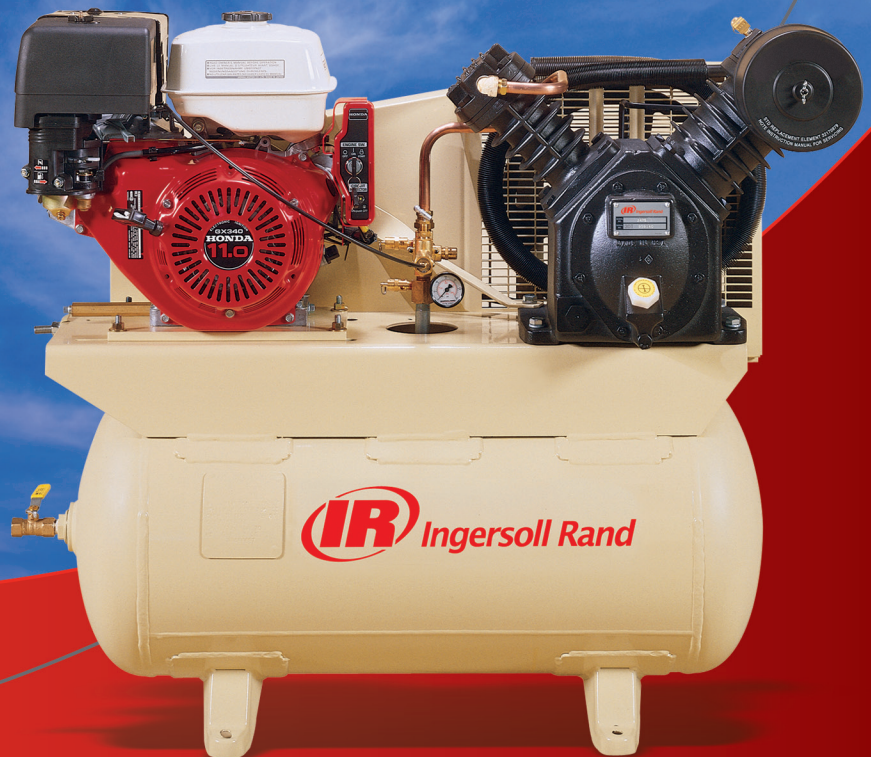

Benefits

- Maximum air power delivers the capacity to do the job right and in less time
- 100% continuous duty for the toughest applications
- Maximum discharge pressure of 175 psi
- Extended pump life
- Durable 100% cast-iron construction
- Built for over 15,000 hours of trouble-free use
- Reliable precision-engineered components
- Extended two-year warranty with use of Ingersoll Rand's All Season Select® synthetic lubricant

Number one in their class

Two-stage Gas Driven Compressors

Standard Features

- Choice of Honda or Kohler gas engine
- Fuel-efficient idle engine control
- 30-gallon horizontal ASME receiver tank
- Enclosed beltguard
- Meets OSHA standards
- Optional baseplate configuration

Engine Features

- 9-hp Honda with pull or electric start, low oil level shutdown
- 13-hp Honda with 12-volt electric starter, pull start, low oil level shutdown, 3-amp recharging system
- 13-hp Kohler with 12-volt electric starter

Removable cylinders

Easy to repair. Provides even, 360° cooling. Eliminates hot spots.

Simple multifinger valves

Dependable and easy to maintain.

Two-stage design

Provides 175 psi operation.

One-piece connecting rod

Fewer wearing parts.

Overhung crankshaft


Precision-balanced to run smoothly and quietly.

Splash lubrication


Simple and reliable. Does not require oil pump, so it is inexpensive and easy to maintain.

Finned copper intercooler

Runs cool in even the most demanding conditions.

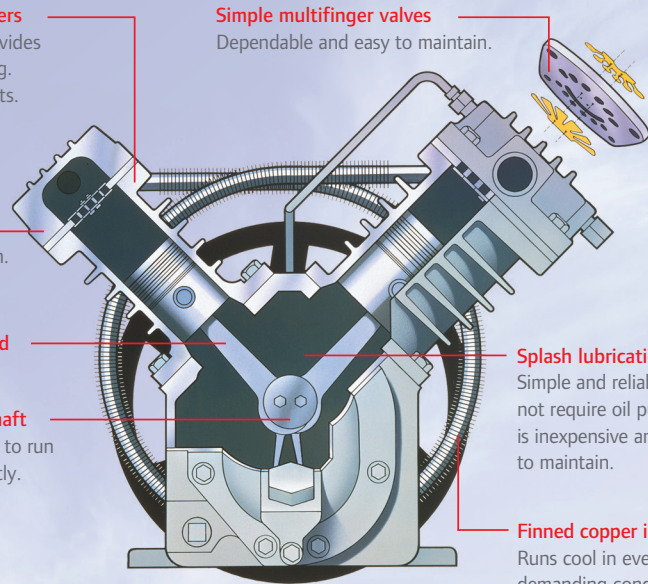

100% cast-iron



2475F13GH



2475F14G

Specifications

Model	Power hp	Engine	Capacity (afcm) @ 175 psig	Max Pressure psig	Package Dimensions			Net Weight lb	NPT Outlet
					Length in	Width in	Height in		
2475F13GH	13	Honda	25.0	175	44	22	41	430	3/4"
2475X13GH	13	Honda	25.0	175	44	27	22	525	3/4"
2475F14G	13	Kohler	24.0	175	44	22	46	429	3/4"
2475X14G	13	Kohler	24.0	175	44	22	46	385	3/4"



ingersollrandproducts.com

Ingersoll Rand (NYSE:IR) advances the quality of life by creating and sustaining safe, comfortable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Schlage®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; secure homes and commercial properties; and increase industrial productivity and efficiency. We are a \$14 billion global business committed to a world of sustainable progress and enduring results.

Ingersoll Rand, IR, the IR logo are trademarks of Ingersoll Rand, its subsidiaries and/or affiliates.

Ingersoll Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll Rand does not approve specialized equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service.

Nothing contained on these pages is intended to extend any warranty or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request.

Product improvement is a continuing goal at Ingersoll Rand. Designs, available functions and specifications are subject to change without notice or obligation.